

## Magnetic Fields Spring 2024


### Introduction

The purpose of this experiment is to observe the magnetic fields,  $\vec{B}$  of a bar magnet, a coil of current-carrying wire, and a straight current-carrying wire. *Note that there are three templates available in lab that you will be completing and turning in with your lab journal.*


### Experiment

#### 1. THE $\vec{B}$ FIELD OF A PERMANENT BAR MAGNET

- Determine the orientation of your compass using the large horseshoe magnet (**Figure 1**), and record in your journal. *Take care not to get the compass too close to the magnet (if your compass is reversed, ask your instructor for a replacement).*
- Note that the red bar magnets have either a ‘bump’ or a white dot on one end. Use your compass to determine if this is the north or south pole of the magnet. Draw a sketch of the magnet and your compass, and then explain how you determined the magnet polarity. *Note that the magnets in the lab may not be oriented the same!*
- Locate the lab bench with a sheet of paper containing an arrangement of compasses (**Figure 2**). Place your magnet in the center of the page, being careful not to disturb the compasses. Using *Template 1: B Field of a Bar Magnet*, draw arrows to show the direction each compass points. Remember that each compass needle represents the direction of  $\vec{B}$  at that location.
- Label the north and south poles of your magnet on the template, along with the side that contains the bump or white dot.
- Rotate your magnet  $180^\circ$  on the page, and note the effect on the compass needle directions.



**Figure 1:**  $B$  in horseshoe magnet




**Figure 2:** Bar magnet & compasses

#### 2. THE $\vec{B}$ FIELD OF CURRENT CARRYING COILS


- Appearance of  $\vec{B}$  around a Small coil:** Locate the lab bench with a small vertical coil mounted on a board, surrounded by compasses (**Figure 3**). Note the direction that each compass points with respect to the board when no current flowing (*the switch is vertical, creating an open circuit*).
- The apparatus contains a switch with two positions, labeled “Direct” and “Reverse”, that controls the direction of the current. Move the switch to the side labeled “Direct”, and a small amount of direct current will flow into the coil through the red wire.
- Using *Template 2: B Field of a Current Carrying Coil*, draw arrows to show the direction each compass points (note that there is also a compass inside the coil, represented with dashed lines). Also draw a few arrows on the coil wire to represent the direction of current.
 

*Don't leave the switch closed too long; the coil will get very warm!* Move the switch to its vertical position when you're finished.
- What do you think will happen to the compass direction when the current direction through the coil is reversed? Write down your prediction, then move the switch to “Reverse” and note the result.

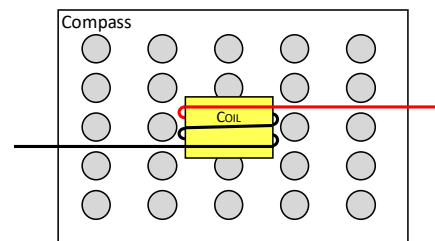

**Figure 3:** Wire coil & compasses

- e. A solenoid is a coil whose length is greater than its diameter. **Figure 4** represents the solenoid connected to a power supply at the back of the lab. Draw a *LARGE* version of this sketch in your journal and include the following:
- the direction of current in the coil
  - the direction of the  $\vec{B}$  field (note the direction the wire wraps around)
- f. **Solenoid calculation:** Record the current through the solenoid,  $I$ , and measure the length of the solenoid,  $\ell$  (measure the length of the coiled wire; don't include the plastic end supports).
- g. Calculate the magnitude of  $\vec{B}$  at the *end* of a solenoid using *Equation 1*:



**Figure 4:** Direction of  $I$  through solenoid


$$B = \frac{\mu_0 NI}{2\ell} \quad \text{Equation 1}$$

where  $\mu_0$  is a constant ( $12.57 \times 10^{-7} \frac{N}{A^2}$ ), and  $N$  is the number of turns in the solenoid ( $N = 560$  for this solenoid). Keeping  $I$  in *Amperes*, and  $\ell$  in *meters* will allow you to calculate  $B$  in units of *Tesla*.

- h. The actual strength of  $B$  at the end of the solenoid is  $8 \times 10^{-3} T$ . Calculate the % difference between your calculated and the actual values of  $B$ .

### 3. THE $\vec{B}$ FIELD OF A CURRENT CARRYING STRAIGHT WIRE.

- Several compasses are arranged on the platform of the apparatus around the vertical wire (**Figure 5**). Observe their direction when no current flows through the wire.
- Use the right-hand rule to predict the direction of the  $\vec{B}$  field when current travels *down* into the platform.
- The apparatus contains a switch with two taps (“Direct” and “Reverse”) which control the direction of current. The “Direct” switch will send current *down* into the platform. **Press and hold** the “Direct” switch, recording the compass needle directions on *Template 3: B Field of a Current Carrying Straight Wire*. Use the appropriate symbol from **Figure 6** to show the current direction. Was your prediction correct?
- Again, predict the direction of the compass needles when the “Reverse” switch is held down. Try it, and compare the results with your prediction.



**Figure 6:**  $B$  around straight wire



**Figure 5:** Showing direction of  $I$  (a) into the page and (b) out of the page

### 4. HOW MUCH CURRENT DOES IT TAKE TO MAKE AN ELECTROMAGNET AS STRONG AS A PERMANENT MAGNET?


The magnitude of  $B$  at one end of the large solenoid connected to the power supply was calculated in step 2g. Now you will calculate the amount of current needed to pass through this solenoid to give it the same  $B$  strength as the bar magnet and the horseshoe magnet.

- Algebraically solve Equation 1 for the current,  $I$ .
- The bar magnets we use have a measured  $B$  of  $40 \times 10^{-3} T$ . Calculate the amount of current you would have to pass through the solenoid to produce the *same*  $B$  as one pole of the bar magnet.
- The large black horseshoe magnet we use has a measured  $B$  of  $195 \times 10^{-3} T$ . Repeat your calculation, this time determining how much current would have to pass through the solenoid to give it the same  $B$  as one pole of the horseshoe magnet.

## 5. FUN WITH MAGNETISM!

There are a few other pieces of equipment in the lab for you to experiment with:

- Visualizing  $\vec{B}$**  : Locate the clear plastic box near the horseshoe magnet; it contains iron filings suspended in silicon oil. Hold this container in various positions near the horseshoe magnet, noting the path of the field lines.
- The force on a current-carrying wire in an external  $\vec{B}$  field (“The Jumping Wire”):**  
***YOUR INSTRUCTOR WILL HELP YOU WITH THIS ONE!***
  - Place a wire between the poles of the horseshoe magnet. Use the right-hand rule to predict the direction the wire will “jump” when current travels in the direction shown in Figure 7 (*out of the page*).
  - Briefly* press the tap switch, and see if your prediction was correct!
  - Draw a sketch showing the correct orientation of the magnet, the  $\vec{B}$  field, the current *and* the force exerted on the wire.
- The interaction of charged particles and a  $\vec{B}$  field:** An old computer has been placed in the lab. Take your bar magnet, move it around in front of the monitor, and observe the effect. ***Don't try this with the other lab computers, or your own computer!***



**Figure 7:** Current carrying wire in external  $B$  field

## Discussion

- Summarize what you have learned about the direction of magnetic fields in permanent magnets, wires and coils.
- Discuss the similarities between the magnetic field observed around the small coil (*Template 2*) and the field around the bar magnet (*Template 1*). *Hint: rotate Template 2 by  $90^\circ$ .*
- In step 4, you calculated the amount of current that needs to be passed through the solenoid to produce the equivalent magnetic field strength as the permanent magnets. Is this a large amount of current?
  - As a comparison, a current of  $0.2\text{ A}$  through the heart can be fatal, and a typical room air conditioner can use around  $8\text{ A}$  – a considerable amount. How do the currents you calculated compare with that used by a typical air conditioner?